

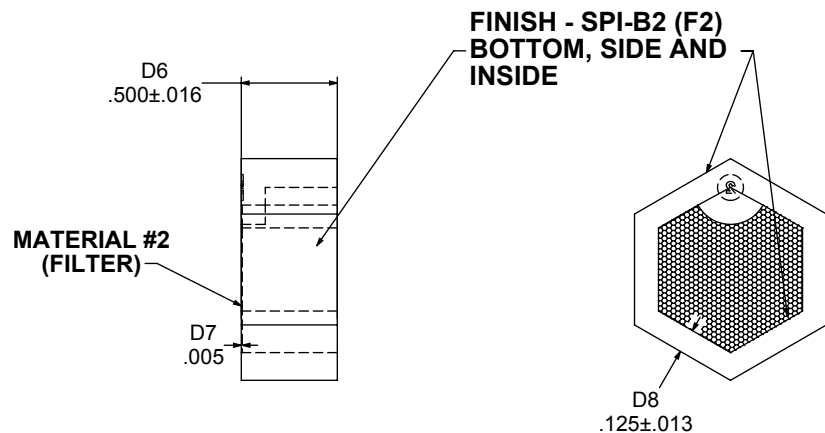


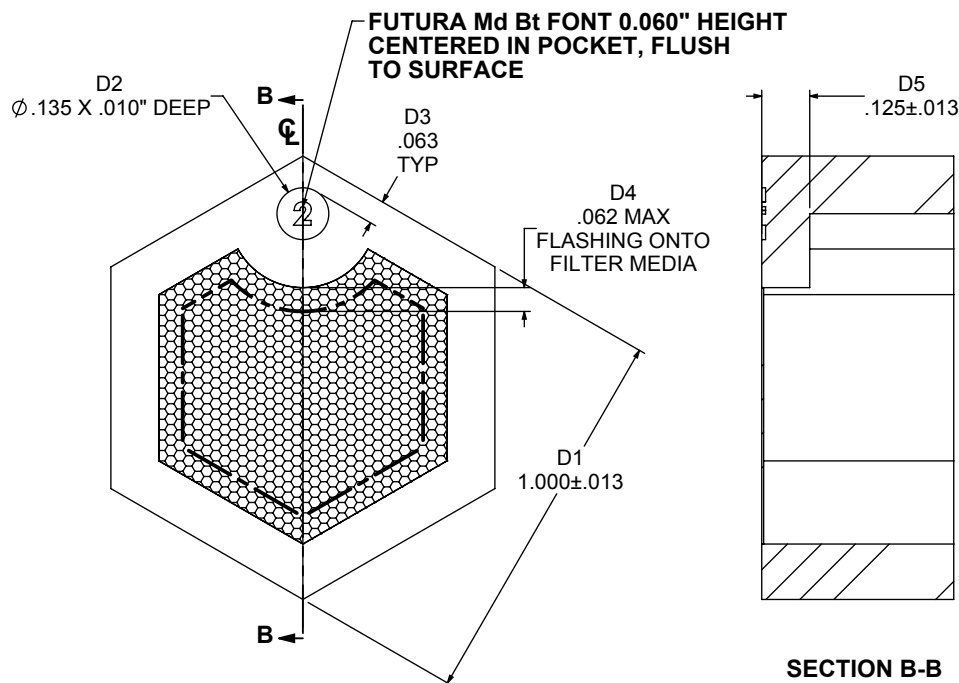

TOP FINISH - SPI-B2
NO TOOL OR SCUFF MARKS

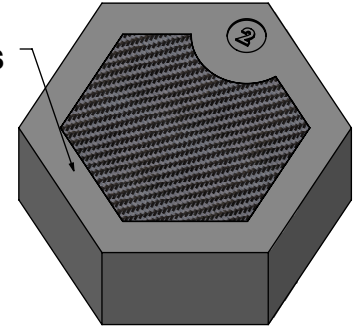

Tensile Strength	ASTMD412	Mpa	6.5
Elongation at break	ASTMD412	%	709.2
Hardness	ASTMD2240		32
Compression set (22hrs @ 175°C)	ASTMD395	%	6.31
Density	ASTMD3165		1.134
Heat aging (70hrs @ 200°C)			
Change in Tensile strength	ASTMD573	%	-41.3
Change in Elongation	ASTMD573	%	-23.9
Change in Hardness	ASTMD573		-5
Compression Stress Modulus			
Compression 5%		Mpa	0.2
Compression 10%		Mpa	0.32
Compression 20%		Mpa	0.41
Compression 25%		Mpa	0.75

NOTES:

UL94 V0 COMPLIANT, WITH NITEX MESH CENTER, RoHS COMPLIANT

This drawing, design, and/or concept, along with all of the contents herein are the exclusive ownership of Vicone High Performance Rubber Inc. Its reproduction and/or distribution are strictly prohibited. Copyright Vicone High Performance Rubber Inc.

TOLERANCES - IMPERIAL
(unless specified otherwise)

RMA-A3-T0.016"



Drawn John Fisher	Date 05/10/11
Checked Eric Leclair	Date 07/07/11
Approved Eric Leclair	Date 03/09/12
Material VicoSil™C303Q - 30 DURO	
Colour COOL GRAY 8C	
Finish SEE NOTES	



VICONE High Performance Rubber Inc.
12-216 Poirier Street
St. Eustache, Quebec, J7R 6B1
www.viconerubber.com
877-VICONE2 (842-6632)

Title -
HEX SAMPLE #2

DWG #
MD00413

Scale:2:1

Sheet 1 of 1

Rev #
00